




Glass Mineral Wool Sound Absorption Coefficients

	Frequency (Hz)	125	250	500	1000	2000	4000
Type	Thickness (mm)						
22kg	25	0.13	0.29	0.61	0.81	0.99	0.97
24kg	25	0.13	0.30	0.65	0.99	0.99	1.00
32kg	25	0.13	0.33	0.61	0.85	1.00	1.00
32kg	80	0.15	0.50	1.00	1.00	1.00	1.00
32kg	75	0.39	0.66	0.92	1.00	1.00	1.00
48kg	25	0.10	0.32	0.66	0.92	1.10	1.28
48kg	50	0.29	0.64	0.88	1.00	1.00	1.00
48kg	75	0.37	0.69	0.92	1.00	1.00	1.00
48kg	100	0.96	1.00	1.00	1.00	1.00	1.00

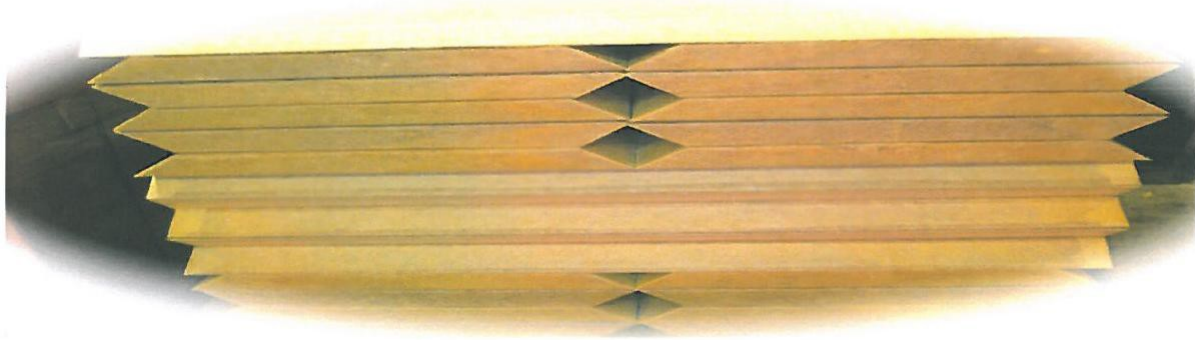

Note: The information and instructions provided in relation to our products are based on experimental and practical experience and are general recommendations. Local conditions can affect the results and as the qualification and experience of the personnel used in the installation is beyond the control of Cammach Group Ltd we do not take responsibility for the results obtained when using our products.

